



M12 CD

SERVICE PARTS DIAGRAM

TTI Model Number: 018 078 018, 027

M12 FUEL™ COMPACT 2-SPEED DRIVER

Bulletin Date:

Mar-20


Starting Serial Number:

VERSION A - L2013

00

0

EXAMPLE:
Component Parts (Small #)
Are Included When Ordering
The Assembly (Large #).

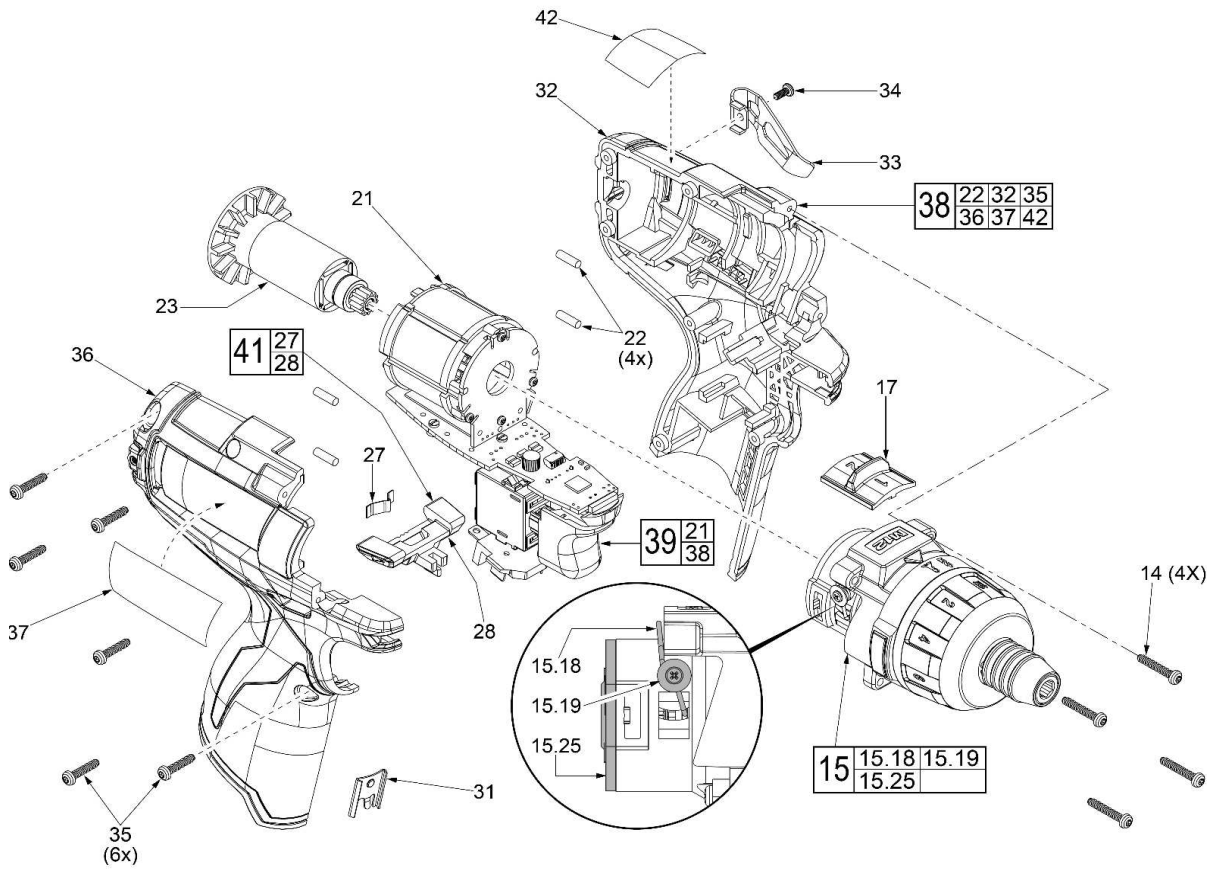



M12 CD

SERVICE PARTS LIST

TTI Model Number: 018 078 018, 027

M12 FUEL™ COMPACT 2-SPEED DRIVER

Bulletin Date:

Mar-20

Starting Serial Number:

VERSION A - L2013

ITEM	PART NUMBER	PART DESCRIPTION	QTY (PCS)
14	660230017	M3 X 18MM SCREW	4
15	202078002	GEARCASE ASSEMBLY	1
15.18	693098001	SPEED SELECTOR LEVER	1
15.19	661262001	M2.3 X 4.5MM SCREW	2
15.25	524220001	MOTOR MOUNTING PLATE	1
17	350398003	SPEED SELECTOR BUTTON	1
21	298074001	MOTOR STATOR,12V-DC BL40 L30MM 300WATTI	1
22	560135001	RUBBER PIN	4
23	202075005	SERVICE ROTOR	1
27	633852003	SHUTTLE SPRING	1
28	524171002	FORWARD / REVERSE SHUTTLE	1
31	631542003	HOUSING CONNECTION CLIP	1
32	-	LEFT HOUSING HALVE	1
33	634097001	BELT CLIP	1
34	661703001	M2.5 X 6MM SCREW	1
35	660570005	M3 X 14MM SCREW	6
36	-	RIGHT HOUSING HALVE	1
37	941048124	SERVICE NAMEPLATE	1
38	202075013	HOUSING KIT	1
39	202075010	HOUSING / ELECTRONICS KIT	1
40	204552007	BLOW MOLDED CARRYING CASE	1
41	202075009	FORWARD / REVERSE SHUTTLE KIT	1
42	940221346	WARNING LABEL	1



M12 CD

SERVICE INSTRUCTION

TTI Model Number: 018 078 018, 027


M12 FUEL™ COMPACT 2-SPEED DRIVER

Bulletin Date:


Mar-20

Starting Serial Number:

VERSION A - L2013

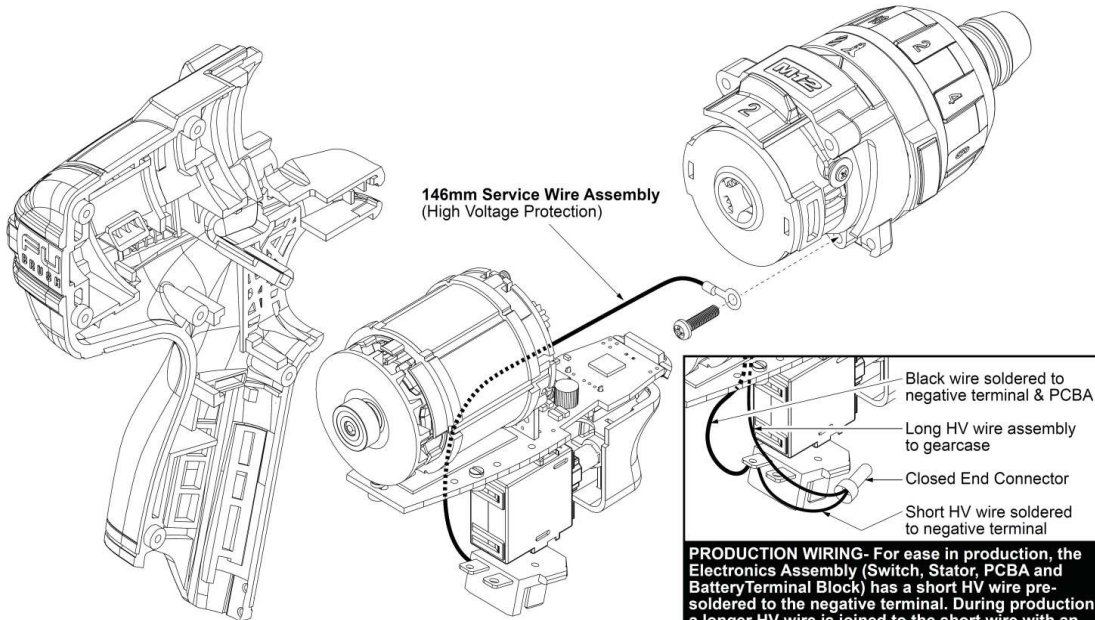


PRODUCTION WIRING- For ease in production, the Electronics Assembly (Switch, Stator, PCBA and Battery/Terminal Block) has a short HV wire pre-soldered to the negative terminal. During production a longer HV wire is joined to the short wire with an open end connector than grounded to the gearcase.

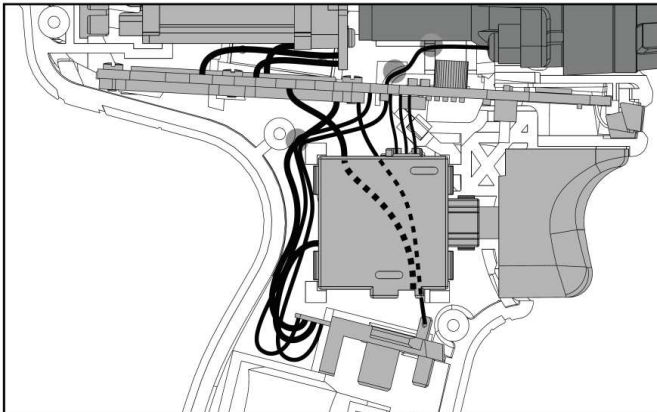

Black wire soldered to negative terminal & PCBA
146mm Wire Assembly. Solder one end to terminal and ground the other end to gearcase
Snip short production HV wire at terminal here

SERVICE WIRING- When installing a service replacement High Voltage Wire it is recommended to snip the old HV wire system at the battery terminal. Remove and discard that short wire, the open end connector and longer wire. Follow the instructions to install new wire assembly.

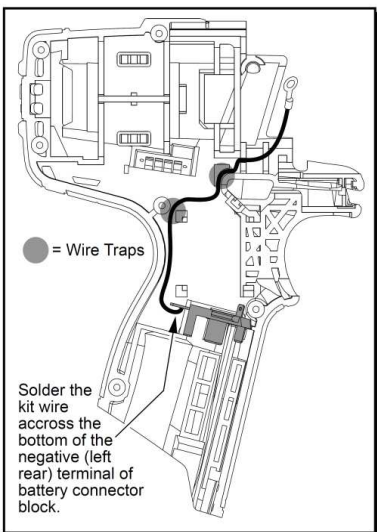

1. Remove the six handle screws, the housing connection clip and the four gearcase screws. Remove housing cover (right housing half). Carefully remove the electronics assembly and gearbox assembly from the housing support (left housing half).
2. With a small side cutter, snip the short production HV wire close to the terminal (see illustration above). Unscrew the ring terminal from the lower right position of the gearcase. Remove and discard the old HV system (short HV wire, the open end connector and longer HV wire).
3. Place the wire strand end of the 146mm High Voltage Wire across the bottom of the negative (rear left) terminal of the battery connector block and carefully solder in place (Note wire is to be positioned so wire extends to the left of the terminal, routing into the left housing half). See illustration above.
4. As an aid to routing the HV wire, carefully remove the gearcase assembly from the electronics assembly.
5. Loosely place the electronics assembly into the left housing half. Route the HV wire under the switch/battery connector block wires using the same wire trap at the upper left corner of the switch. Route HV wire behind the PCBA and into the small traps in the left housing half. Lay HV wire across the PCBA facing outward to the right.
6. Place the ring terminal of HV wire over the screw opening in the lower right position of the gearcase (with wire to the inside of the tool) and reinstall the screw to ground the system.
7. Carefully place the gearcase assembly back onto motor assembly. Secure the gearcase assembly with two of the gearcase screws into the front of the new left housing half.
8. Take time to make sure that all components are back in place. Press all wires firmly into traps. Be sure the LED, PCBA, switch assembly and battery connector block are squarely and firmly in place. Be sure the fwd./rev. shuttle functions properly and that the shuttle spring is in place.
9. Gently put the right housing half back in place and check for any interferences prior to securing with the six handle screws and two remaining gearcase screws. Insert housing clip.